

GPTP3183

PHASE CONTROLLED SCR

High reliability operation

DC power supply

AC drives

VOLTAGE UP TO	2400 V
AVERAGE CURRENT	1830 A
SURGE CURRENT	30 kA

BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V_{RRM}	Repetitive peak reverse voltage	2400 V
V_{RSM}	Non-repetitive peak reverse voltage	2400 V
V_{DRM}	Repetitive peak off-state voltage	2500 V
I_{DRM}	Repetitive peak off-state current, max.	150 mA
I_{IRRM}	Repetitive peak reverse current, max.	150 mA

ON-STATE CHARACTERISTICS

$I_{T(AV)}$	Average on-state current	Sine wave, 180° conduction, $T_h = 55^\circ C$	1830 A
$I_{T(RMS)}$	R:M:S on-state current	Sine wave, 180° conduction, $T_h = 55^\circ C$	2873 A
I_{TSM}	Surge on-state current	Non rep. half sine wave, 50 Hz, $V_R = 0 V$, $T_j = T_{jmax}$	30 kA
$I^2 t$	$I^2 t$ for fusing coordination		4500 KA ² s
$V_{T(TO)}$	Threshold voltage	$T_j = T_{jmax}$	0.950 V
r_T	On-state slope resistance	$T_j = T_{jmax}$	0.176 mΩ
V_{TM}	Peak on-state voltage, max	On-state current $I_T = 3000 A$, $T_j = T_{jmax}$	1.48 V
I_H	Holding current, typ	$T_j = 25^\circ C$	300 mA
I_L	Latching current, typ	$T_j = 25^\circ C$	1500 mA

TRIGGERING CHARACTERISTICS

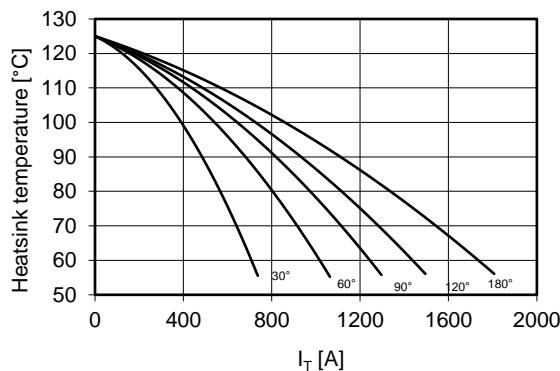
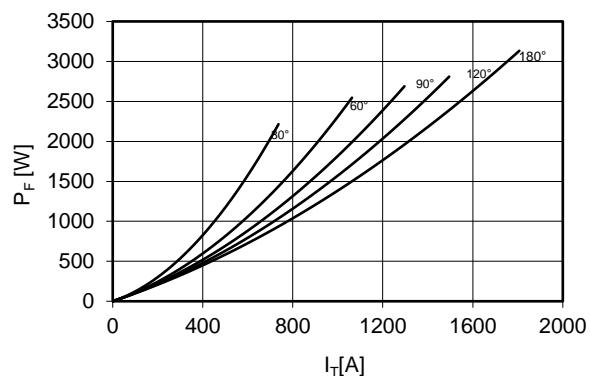
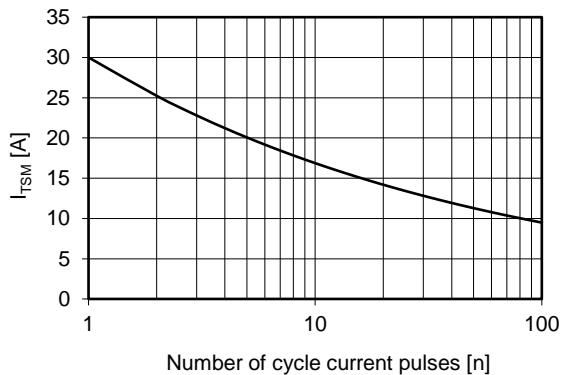
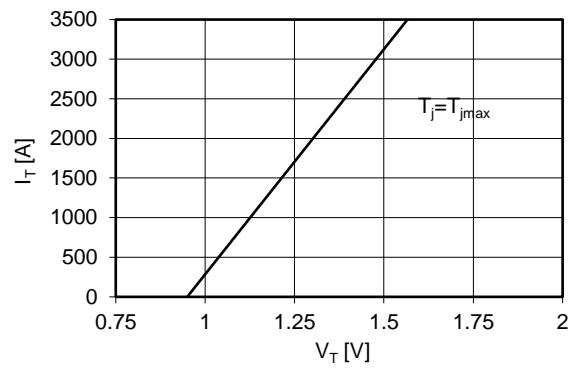
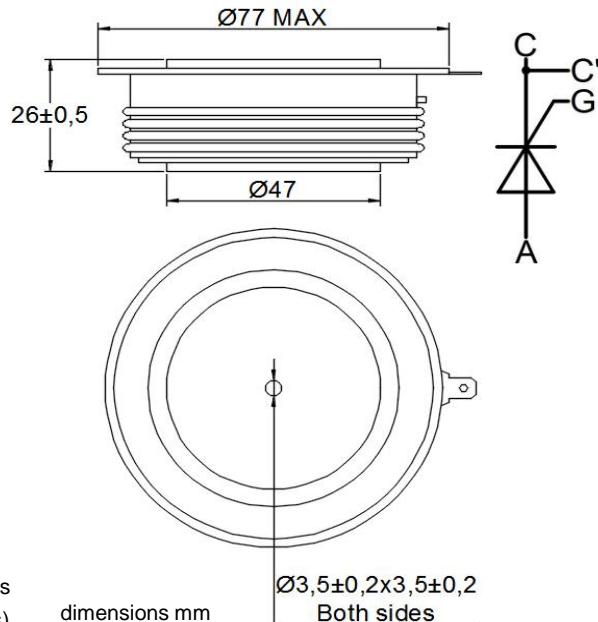
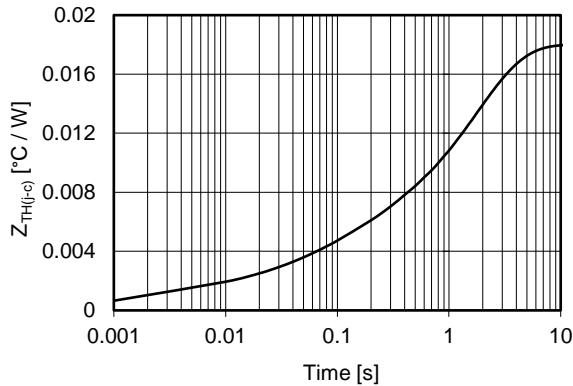
V_{GT}	Gate trigger voltage	$T_j = 25^\circ C$, $V_D = 5 V$	2.5 V
I_{GT}	Gate trigger current	$T_j = 25^\circ C$, $V_D = 5 V$	300 mA
V_{GD}	Non-trigger voltage	$V_D = 67\% V_{RRM}$, $T_j = T_{jmax}$	0.4 V
P_{GM}	Peak gate power dissipation	Pulse width 100 μs	150 W
$P_{G(AV)}$	Average gate power dissipation		3 W
I_{FGM}	Peak gate current		8 A
V_{FGM}	Peak gate voltage (forward)		12 V
V_{RGM}	Peak gate voltage (reverse)		5 V

SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	$T_j = T_{jmax}$	300 A/μs
dV/dt	Critical rate of rise of off-state voltage	$T_j = T_{jmax}$	1000 V/μs
t_{q}	Turn-off time, typ	$T_j = T_{jmax}$, $I_T = 1000 A$, $di/dt = -20 A/\mu s$ $V_R = 50 V$, $V_D = 67\% V_{DRM}$, $dV/dt = 20 V/\mu s$	200 μs

THERMAL AND MECHANICAL CHARACTERISTICS

$R_{th(j-c)}$	Thermal resistance (junction to case)	Double side cooled	0.018 °C/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Double side cooled	0.004 °C/W
T_{jmax}	Max operating junction temperature		125 °C
T_{stg}	Storage temperature		-40 / 125 °C
F	Clamping force ± 10%		26 kN
	Mass		520 g

Current rating - sine wave

Power loss - sine wave

**Maximum surge current
d.s. cooled**

On-state voltage drop

Thermal impedance (j-c)


Ordering information GPTP3183-VVGL

- VV:** blocking voltage / 100 (e.g. 24 for 2400 V)
- G:** trigger lead type (**S** = straight **T** = twisted **blank** = no leads)
- L:** trigger lead length x 100mm (3 - 4 - 5 - 7 **blank** = no leads)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.