

GFDM12D0

FAN DETECTION MODULE

DETECTS THE ABSENCE
OF FAN CURRENT

LINE VOLTAGE UP TO 230V
FAN CURRENT UP TO 2A
NO/NC OUTPUT SWITCH
DIN BAR MOUNTING

The GFDM12D0 detects the absence of current circulating in the fan. This can be used for ventilation fault signal generation in power semiconductor assembly

Characteristic	Conditions	Value
ILOAD (RMS)	Maximum fan current	2 A
V (RMS)	Maximum voltage (fan side)	230 V
VINS (RMS)	Insulation voltage	2000 V

RELAY CONTACT CHARACTERISTICS


VMAX (DC)	Maximum voltage (across contact)		30 V
IMAX (DC)	Maximum current (through contact)		2 A
	Expected electrical life	Number of operations	10 ⁵
	Expected mechanical life	Number of operations	10 ⁸

MECHANICAL AND THERMAL CHARACTERISTICS


Width		45 mm
Depth		73 mm
Height		45 mm
W	Weight	55 g
	DIN Bar	35 mm
	Max allowed wire gauge	16 AWG 1.5 mm ²
T _a max	Max amb. op. Temp.	40 °C
T _{stg}	Storage temperature	-40/60 °C

FUNCTIONAL SCHEMATIC

FAN BOARD

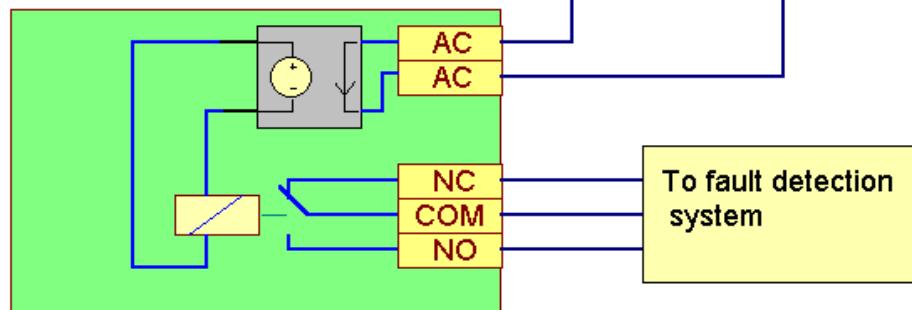

OUTLINE

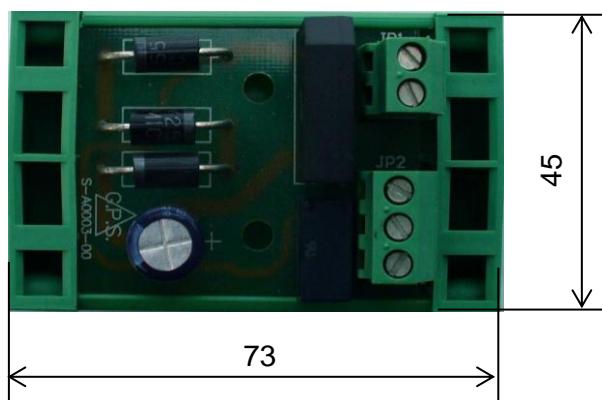

LEGEND	
Terminal	Function
JP 1-1	AC
JP 1-2	AC
JP 2-1	NC
JP 2-2	COM
JP 2-3	NO



All dimensions in mm

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.