

GPDP3274

RECTIFIER DIODE



VOLTAGE UP TO 3000 V
AVERAGE CURRENT 2740 A
SURGE CURRENT 31 kA

BLOCKING CHARACTERISTICS

Characteristic		Conditions	Value
V _{RRM}	Repetitive peak reverse voltage		3000 V
V _{RSM}	Non-repetitive peak reverse voltage		3000 V
I _{RRM}	Repetitive peak reverse current, max.	V _{RRM} , single phase, half wave, T _j = T _{jmax}	75 mA

FORWARD CHARACTERISTICS

I _{F(AV)}	Average forward current	Sine wave, 180° conduction, T _c = 55°C	2740 A
I _{F(RMS)}	R.M.S. forward current	Sine wave, 180° conduction, T _c = 55°C	4304 A
I _{FSM}	Surge forward current	Non rep. half sine wave, 50 Hz, V _R = 0 V, T _j = T _{jmax}	31 kA
I ² t	I ² t for fusing coordination		4805 kA ² s
V _{F(TO)}	Threshold voltage	T _j = T _{jmax}	0.84 V
r _F	Forward slope resistance	T _j = T _{jmax}	0.125 mΩ
V _{FM}	Peak forward voltage, max	Forward current I _F = 2800 A, T _j = T _{jmax}	1.19 V


SWITCHING CHARACTERISTICS

Q _{rr}	Reverse recovery charge, typ	T _j = T _{jmax} , I _F = 2000 A, di/dt = -5 A/μs	μC
I _{rr}	Reverse recovery current	V _R = 100 V	A
t _{rr}	Reverse recovery time		μs
V _{FP}	Forward recovery voltage	T _j = T _{jmax} , di/dt = A/μs	V


THERMAL AND MECHANICAL CHARACTERISTICS

R _{th(j-c)}	Thermal resistance (junction to case)	Double side cooled	0.020 °C/W
R _{th(c-h)}	Thermal resistance (case to heatsink)	Double side cooled	0.006 °C/W
T _{jmax}	Max operating junction temperature		175 °C
T _{stg}	Storage temperature		-40 / 175 °C
F	Clamping force ± 10%		22 kN
	Mass		520 g


Current rating - sine wave

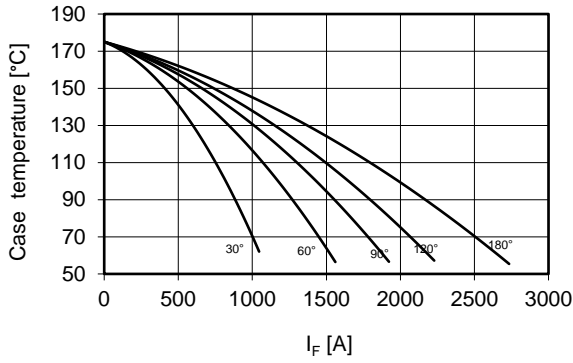


Power loss - sine wave

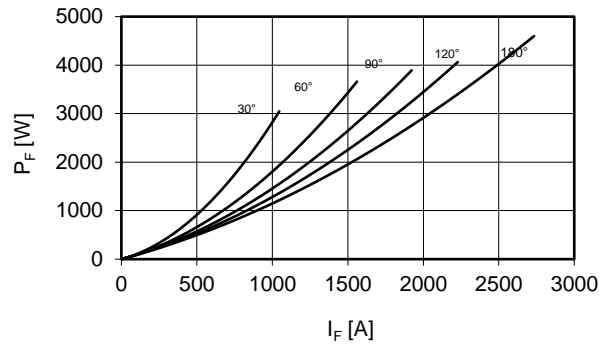



Maximum surge current d.s. cooled

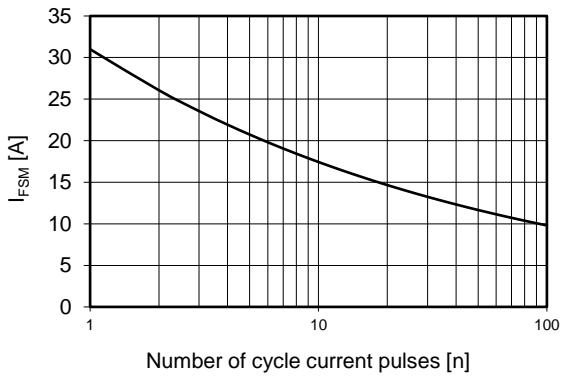

Forward voltage drop

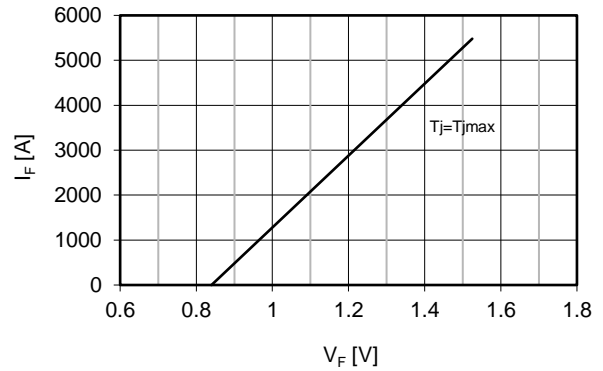

Thermal Impedance (j-c)

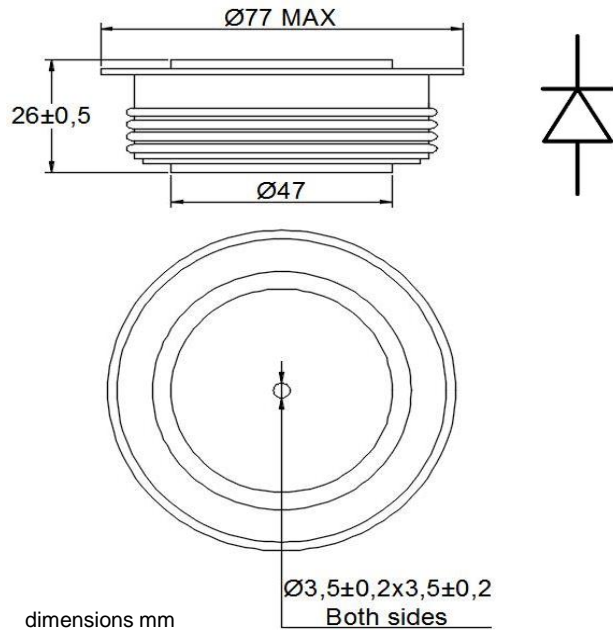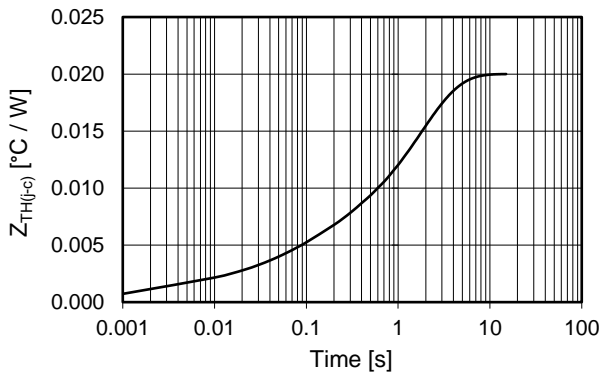

Ordering information GPDP3274-VV

VV: blocking voltage / 100 (e.g. 30 for 3000V)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.