

# GPDR3620

## RECTIFIER DIODE

VOLTAGE UP TO	2800 V
AVERAGE CURRENT	6200 A
SURGE CURRENT	55 kA

### BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
$V_{RRM}$	Repetitive peak reverse voltage	2800 V
$V_{RSM}$	Non-repetitive peak reverse voltage	2800 V
$I_{RRM}$	Repetitive peak reverse current, max.	150 mA

### FORWARD CHARACTERISTICS

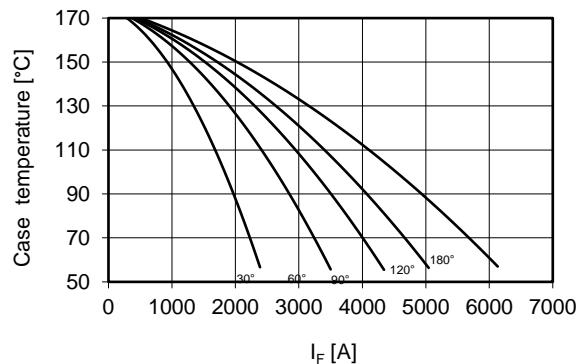
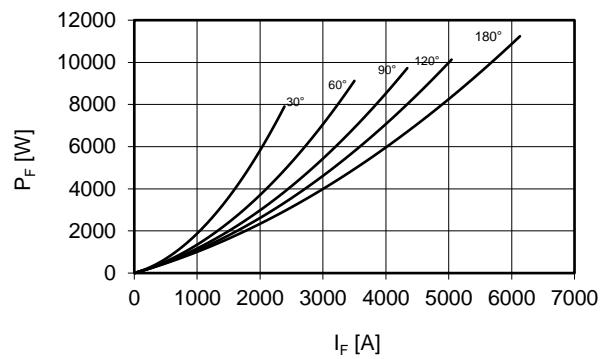
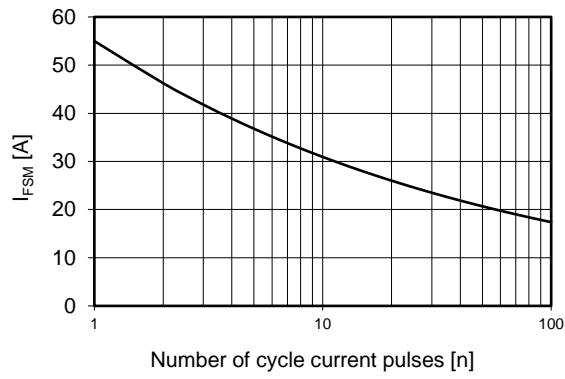
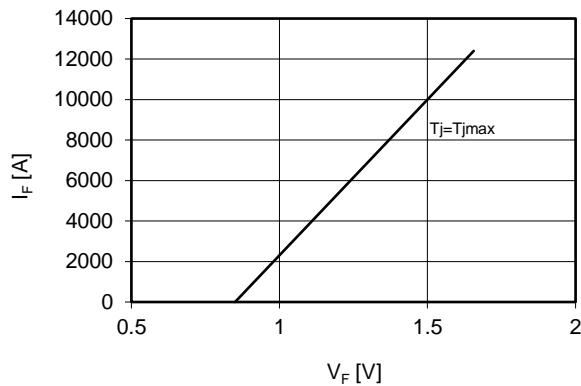
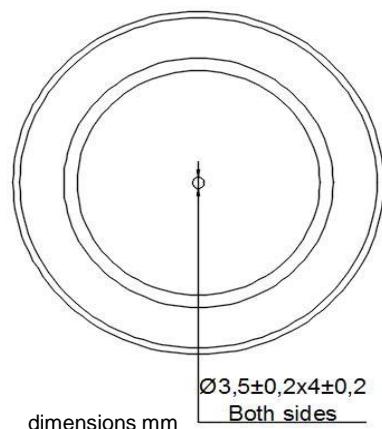
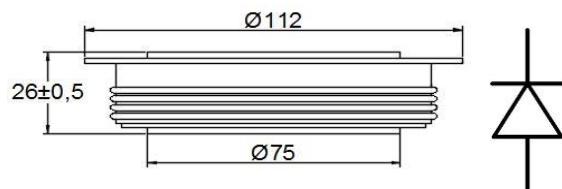
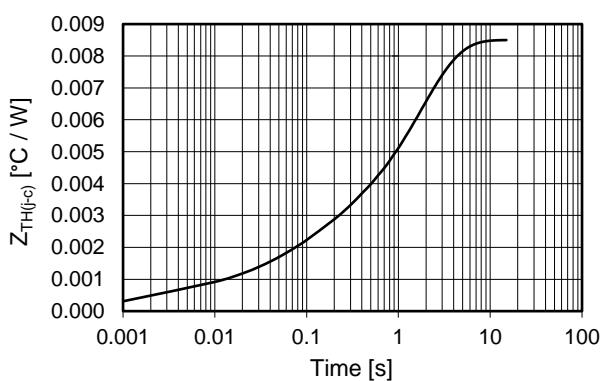
$I_{F(AV)}$	Average forward current	Sine wave, 180° conduction, $T_h = 55^\circ C$	6200 A
$I_{F(RMS)}$	R.M.S. forward current	Sine wave, 180° conduction, $T_h = 55^\circ C$	9739 A
$I_{FSM}$	Surge forward current	Non rep. half sine wave, 50 Hz, $V_R = 0 V$ , $T_j = T_{jmax}$	55 kA
$I^2 t$	$I^2 t$ for fusing coordination		15125 kA <sup>2</sup> s
$V_{F(TO)}$	Threshold voltage	$T_j = T_{jmax}$	0.85 V
$r_F$	Forward slope resistance	$T_j = T_{jmax}$	0.065 mΩ
$V_{FM}$	Peak forward voltage, max	Forward current $I_F = 5000 A$ , $T_j = T_{jmax}$	1.2 V

### SWITCHING CHARACTERISTICS

$Q_{rr}$	Reverse recovery charge, typ	$T_j = T_{jmax}$ , $I_F = 2000 A$ , $di/dt = -5 A/\mu s$	$\mu C$
$I_{rr}$	Reverse recovery current	$V_R = 100 V$	A
$t_{rr}$	Reverse recovery time		$\mu s$

### THERMAL AND MECHANICAL CHARACTERISTICS

$R_{th(j-c)}$	Thermal resistance (junction to case)	Double side cooled	0.009 °C/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Double side cooled	0.002 °C/W
$T_{jmax}$	Max operating junction temperature		175 °C
$T_{stg}$	Storage temperature		-40 / 175 °C
$F$	Clamping force ± 10%		50 kN
	Mass		1500 g

**Current rating - sine wave**

**Power loss - sine wave**

**Maximum surge current  
d.s. cooled**

**Forward voltage drop**

**Thermal Impedance ( $j-c$ )**


### Ordering information GPDR3620-VV

VV: blocking voltage / 100 (e.g. 28 for 2800V)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.