

GPTG2072

PHASE CONTROLLED SCR

High reliability operation

DC power supply

AC drives

VOLTAGE UP TO	1600 V
AVERAGE CURRENT	720 A
SURGE CURRENT	8.5 kA

BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V_{RRM}	Repetitive peak reverse voltage	1600 V
V_{RSM}	Non-repetitive peak reverse voltage	1700 V
V_{DRM}	Repetitive peak off-state voltage	1600 V
I_{DRM}	Repetitive peak off-state current, max.	V_{DRM} , single phase, half wave, $T_j = T_{jmax}$
I_{IRRM}	Repetitive peak reverse current, max.	V_{RRM} , single phase, half wave, $T_j = T_{jmax}$

ON-STATE CHARACTERISTICS

$I_{T(AV)}$	Average on-state current	Sine wave, 180° conduction, $T_h = 55^\circ C$	720 A
$I_{T(RMS)}$	R.M.S. on-state current	Sine wave, 180° conduction, $T_h = 55^\circ C$	1131 A
I_{TSM}	Surge on-state current	Non rep. half sine wave, 50 Hz, $V_R = 0 V$, $T_j = T_{jmax}$	8.5 kA
$I^2 t$	$I^2 t$ for fusing coordination		361 KA ² s
$V_{T(TO)}$	Threshold voltage	$T_j = T_{jmax}$	0.90 V
r_T	On-state slope resistance	$T_j = T_{jmax}$	0.650 mΩ
V_{TM}	Peak on-state voltage, max	On-state current $I_T = 1000 A$, $T_j = 25^\circ C$	1.62 V
I_H	Holding current, max	$T_j = 25^\circ C$	600 mA
I_L	Latching current, typ	$T_j = 25^\circ C$	1000 mA

TRIGGERING CHARACTERISTICS

V_{GT}	Gate trigger voltage	$T_j = 25^\circ C$, $V_D = 5 V$	3.0 V
I_{GT}	Gate trigger current	$T_j = 25^\circ C$, $V_D = 5 V$	200 mA
V_{GD}	Non-trigger voltage	$V_D = 67\% V_{RRM}$, $T_j = T_{jmax}$	0.25 V
P_{GM}	Peak gate power dissipation	Pulse width 5 ms	10 W
$P_{G(AV)}$	Average gate power dissipation		2 W
I_{FGM}	Peak gate current		3 A
V_{FGM}	Peak gate voltage (forward)		20 V
V_{RGM}	Peak gate voltage (reverse)		5 V


SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	$T_j = T_{jmax}$	200 A/μs
dV/dt	Critical rate of rise of off-state voltage	$T_j = T_{jmax}$	500 V/μs
t_{q}	Turn-off time, typ	$T_j = T_{jmax}$, $I_T = 320 A$, $di/dt = -12.5 A/\mu s$ $VR = 100 V$, $VD = 67\% V_{DRM}$, $dV/dt = 20 V/\mu s$	μs


THERMAL AND MECHANICAL CHARACTERISTICS

$R_{th(j-c)}$	Thermal resistance (junction to case)	Double side cooled	0.032 °C/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Double side cooled	0.015 °C/W
T_{jmax}	Max operating junction temperature		125 °C
T_{stg}	Storage temperature		-40 / 125 °C
F	Clamping force ± 10%		9.0 kN
	Mass		100 g


Current rating - sine wave

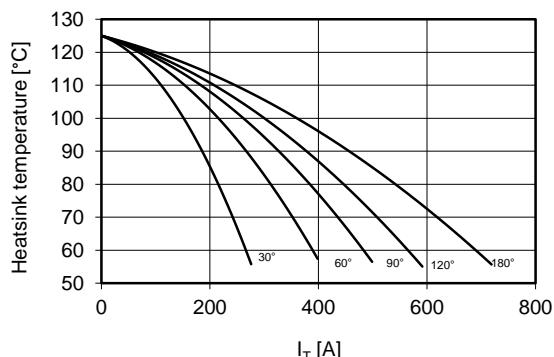


Power loss - sine wave

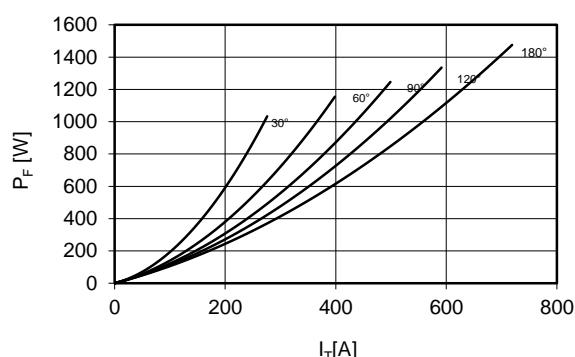



**Maximum surge current
d.s. cooled**

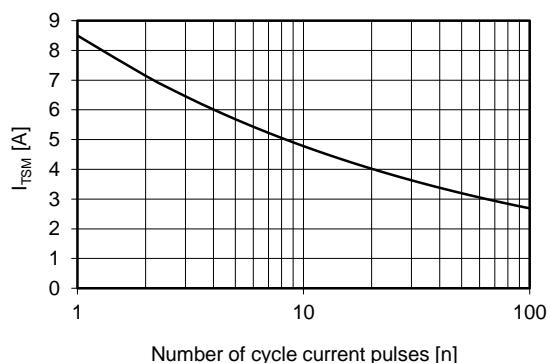

On-state voltage drop

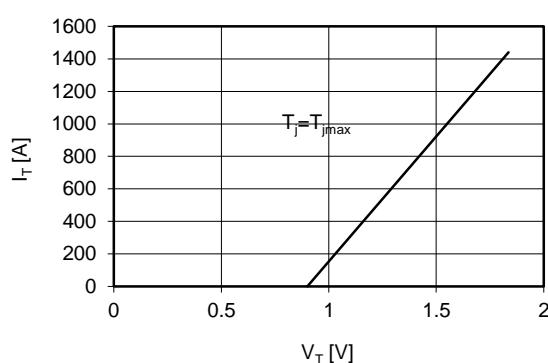

Thermal impedance (j-c)

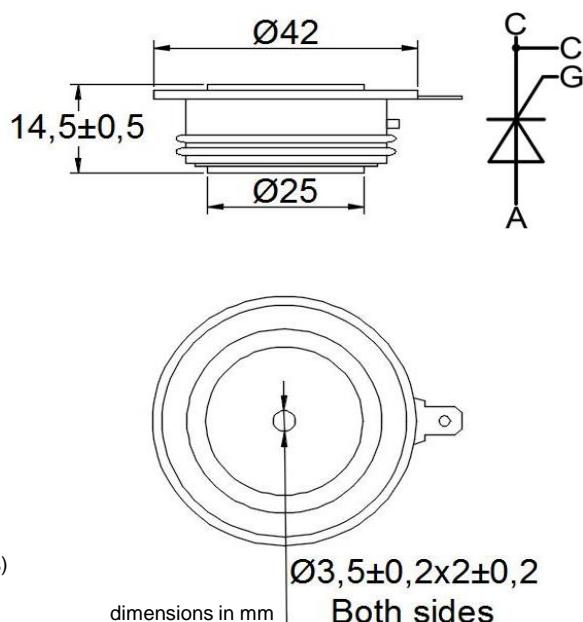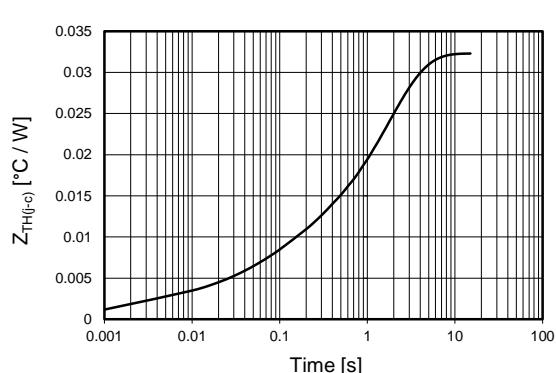

Ordering information GPTG2072-VVGL

VV: blocking voltage / 100 (e.g. 16 for 1600 V)

G: trigger lead type (**S** = straight **T** = twisted **blank** = no leads)

L: trigger lead lenght x 100mm (**3 - 4 - 5 - 7 blank** = no leads)

dimensions in mm

Ø3,5±0,2x2±0,2
Both sides

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.

Document GPTG2072T003