

GPTR1505

PHASE CONTROLLED SCR

High reliability operation
Electroplating applications
Resistance welding applications

BLOCKING VOLTAGE UP TO	800	V
AVERAGE CURRENT	5050	A
SURGE CURRENT	70	kA



BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V_{RRM}	Repetitive peak reverse voltage	800 V
V_{RSM}	Non-repetitive peak reverse voltage	900 V
V_{DRM}	Repetitive peak off-state voltage	800 V
I_{DRM}	Repetitive peak off-state current, max.	300 mA
I_{RRM}	Repetitive peak reverse current, max.	300 mA

ON-STATE CHARACTERISTICS

$I_{T(AV)}$	Average on-state current	Sine wave, 180° conduction, $T_h = 55^\circ C$	5050 A
$I_{T(RMS)}$	R.M.S. on-state current	Sine wave, 180° conduction, $T_h = 55^\circ C$	7932 A
I_{TSM}	Surge on-state current	Non rep. half sine wave, 50 Hz, $V_R = 0 V$, $T_j = T_{jmax}$	70 kA
$I^2 t$	$I^2 t$ for fusing coordination		24500 kA ² s
$V_{T(TO)}$	Threshold voltage	$T_j = T_{jmax}$	0.83 V
r_T	On-state slope resistance	$T_j = T_{jmax}$	0.062 mΩ
V_{TM}	Peak on-state voltage, max	On-state current $I_T = 5000 A$, $T_j = T_{jmax}$	1.14 V
I_H	Holding current, max	$T_j = 25^\circ C$	300 mA
I_L	Latching current, typ	$T_j = 25^\circ C$	1500 mA

TRIGGERING CHARACTERISTICS

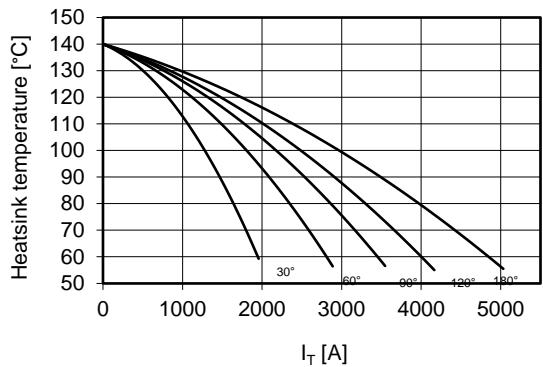
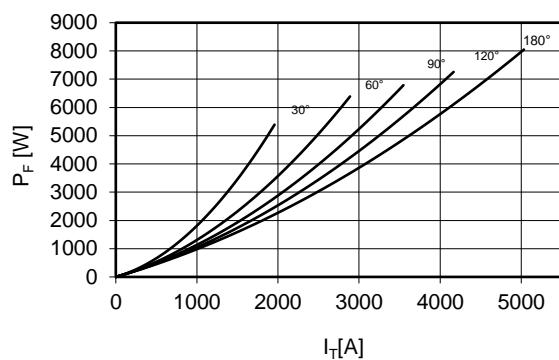
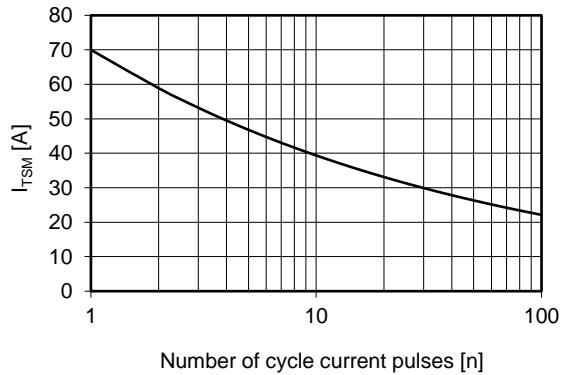
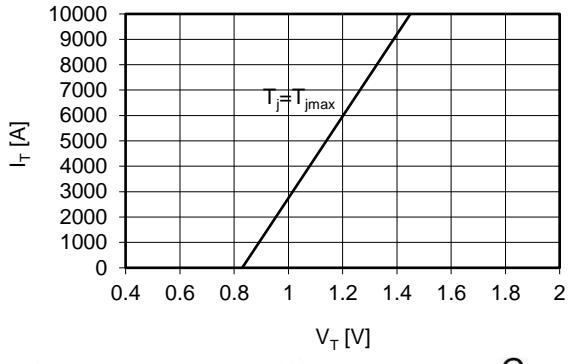
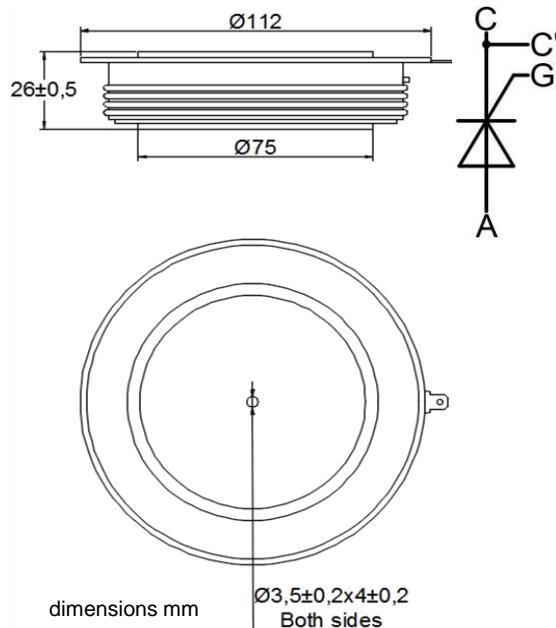
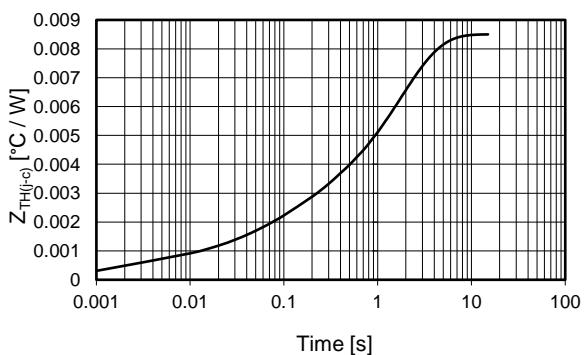
V_{GT}	Gate trigger voltage	$T_j = 25^\circ C$, $V_D = 12 V$	3 V
I_{GT}	Gate trigger current	$T_j = 25^\circ C$, $V_D = 12 V$	300 mA
V_{GD}	Non-trigger voltage	$V_D = 67\% V_{RRM}$, $T_j = T_{jmax}$	0.35 V
P_{GM}	Peak gate power dissipation	Pulse width 0.5 ms	150 W
$P_{G(AV)}$	Average gate power dissipation		5 W
I_{FGM}	Peak gate current		10 A
V_{FGM}	Peak gate voltage (forward)		30 V
V_{RGM}	Peak gate voltage (reverse)		5 V

SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	$T_j = T_{jmax}$	250 A/μs
dV/dt	Critical rate of rise of off-state voltage	$T_j = T_{jmax}$	1000 V/μs
t_q	Turn-off time, typ	$T_j = T_{jmax}$, $I_T = 2000 A$, $di/dt = -10 A/\mu s$ $V_R = 100 V$, $V_D = 67\% V_{DRM}$, $dV/dt = 50 V/\mu s$	250 μs

THERMAL AND MECHANICAL CHARACTERISTICS

$R_{th(j-c)}$	Thermal resistance (junction to case)	Double side cooled	0.009 °C/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Double side cooled	0.002 °C/W
T_{jmax}	Max operating junction temperature		140 °C
T_{stg}	Storage temperature		-40 / 140 °C
F	Clamping force ± 10%		50 kN
	Mass		1500 g

Current rating - sine wave

Power loss - sine wave

**Maximum surge current
d.s. cooled**

On-state voltage drop

Thermal impedance (j-c)


Ordering information GPTR1505-VVGL

- VV:** blocking voltage / 100 (e.g. 08 for 800 V)
- G:** trigger lead type (**S** = straight **T** = twisted **blank** = no leads)
- L:** trigger lead length x 100mm (3 - 4 - 5 - 7 **blank** = no leads)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.