


## GPDD012K



### RECTIFIER DIODE

Low profile ceramic package  
Spot welding applications  
Electroplating applications

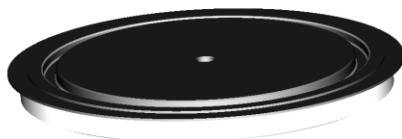

VOLTAGE UP TO	200 V
AVERAGE CURRENT	12100 A
SURGE CURRENT	100 kA

### BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V <sub>RRM</sub>	Repetitive peak reverse voltage	200 V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage	300 V
I <sub>RRM</sub>	Repetitive peak reverse current, max.	50 mA

### FORWARD CHARACTERISTICS

I <sub>F(AV)</sub>	Average forward current	Sine wave, 180° conduction, T <sub>c</sub> = 70°C	12100 A
I <sub>F(RMS)</sub>	R.M.S. forward current	Sine wave, 180° conduction, T <sub>c</sub> = 70°C	19007 A
I <sub>FSM</sub>	Surge forward current	Non rep. half sine wave, 50 Hz, V <sub>R</sub> = 0 V, T <sub>j</sub> = T <sub>jmax</sub>	100 kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination		50000 kA <sup>2</sup> s
V <sub>F(TO)</sub>	Threshold voltage	T <sub>j</sub> = T <sub>jmax</sub>	0.75 V
r <sub>F</sub>	Forward slope resistance	T <sub>j</sub> = T <sub>jmax</sub>	0.021 mΩ
V <sub>FM</sub>	Peak forward voltage, max	Forward current I <sub>F</sub> = 8000 A, T <sub>j</sub> = 25°C	1.01 V


### SWITCHING CHARACTERISTICS

Q <sub>rr</sub>	Rverse recovery charge, typ	T <sub>j</sub> = T <sub>jmax</sub> , I <sub>F</sub> = 1000 A, di/dt = -30 A/μs	600 μC
I <sub>rr</sub>	Reverse recovery current	V <sub>R</sub> = 50 V	A
t <sub>rr</sub>	Reverse recovery time		μs
V <sub>FP</sub>	Forward recovery voltage	T <sub>j</sub> = T <sub>jmax</sub> , di/dt = 100 A/μs	V


### THERMAL AND MECHANICAL CHARACTERISTICS

R <sub>th(j-c)</sub>	Thermal resistance (junction to case)	Double side cooled	0.006 °C/W
R <sub>th(c-h)</sub>	Thermal resistance (case to heatsink)	Double side cooled	0.003 °C/W
T <sub>jmax</sub>	Max operating junction temperature		170 °C
T <sub>stg</sub>	Storage temperature		-40 / 170 °C
F	Clamping force ± 10%		35 kN
	Mass		220 g


**Current rating - sine wave**

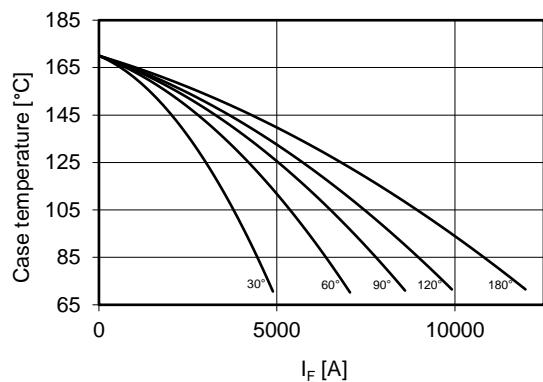


**Power loss - sine wave**

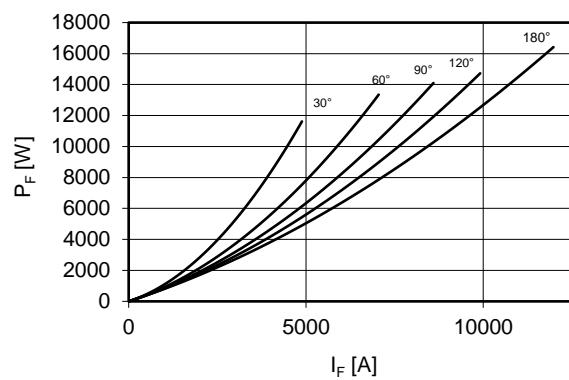



**Maximum surge current  
d.s. cooled**

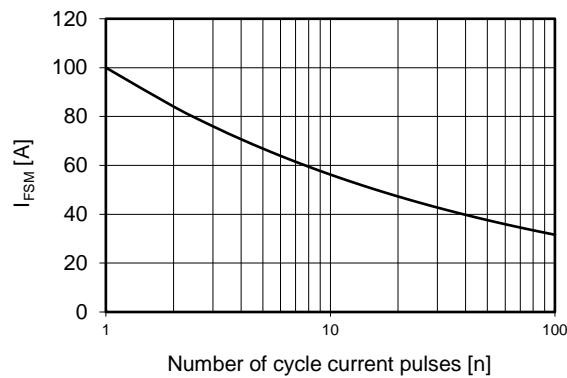

**Forward voltage drop**

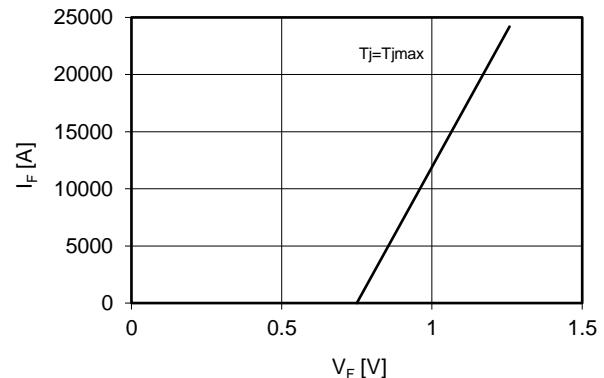

**Thermal Impedance (j-c)**

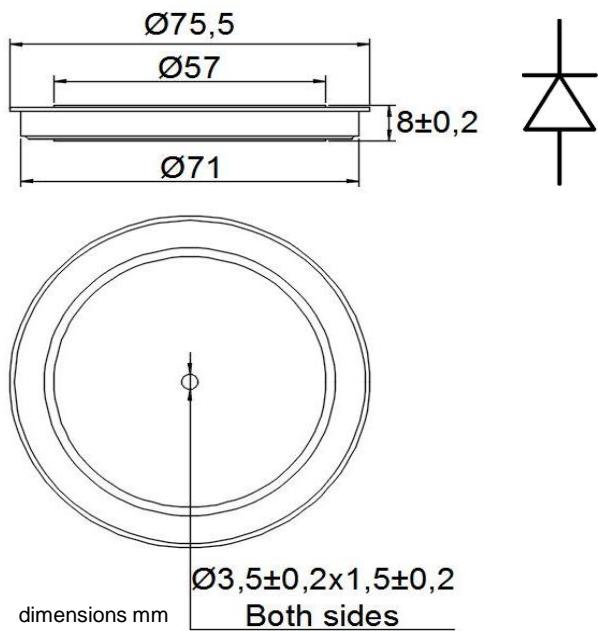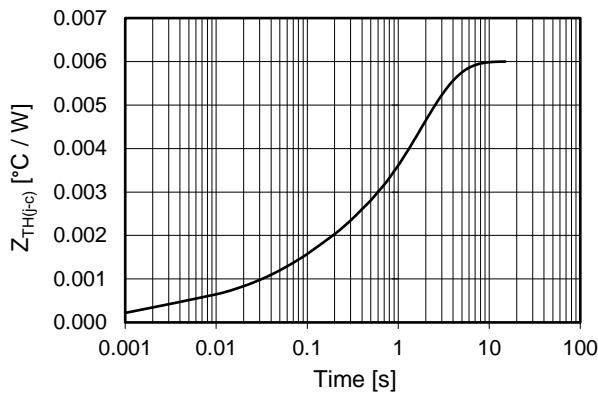

### Ordering information GPDD012K-VV

VV: blocking voltage / 100 (e.g. 02 for 200V)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.